



32W
REPLACEMENT

90+
CRI

15W
Watts

G13

**120V
277V**
Voltage

**DAMP
LOCATION**

High quality of light and color rendering (90+ CRI, 50+ R9),
High lumen output (>140lm/W).






ELECTRICAL SPECIFICATIONS

MODEL NO.	LUMEN	POWER	CCT	BEAM	CRI	PF	CBCP
SE-350.083	2150LM	15W	3000K	320°	>90	>0.9	-
SE-350.102	2150LM	15W	3500K	320°	>90	>0.9	-
SE-350.084	2200LM	15W	4000K	320°	>90	>0.9	-

MECHANICAL SPECIFICATIONS

MODEL NO.	MEASURES	WEIGHT	OPERATIONAL TEMPERATURE	INNER BOX QTY	MASTER CARTON QTY
SE-350.083	47.2in X 1.1in	7.05 oz	-20°C - 40°C	-	25pcs
SE-350.102	47.2in X 1.1in	7.05 oz	-20°C - 40°C	-	25pcs
SE-350.084	47.2in X 1.1in	7.05 oz	-20°C - 40°C	-	25pcs



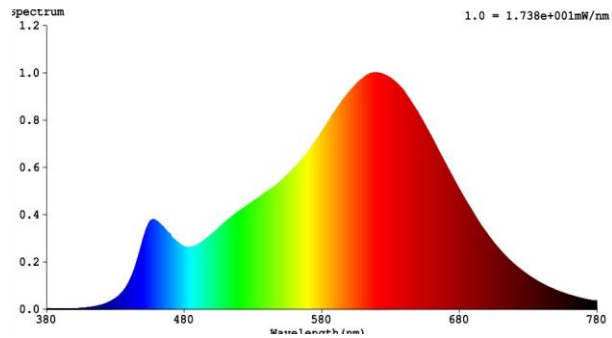

RA – CHART: >90

RA refers to the average value of R1 to R8.

R9 is the score that represents how accurately a light source will reproduce strong red colors. "Accurate" is defined as similarity to daylight or incandescent bulbs, depending on the color temperature.

R VALUES

R1=98	R2=98	R3=98	R4=98	R5=98	R6=94	R7=90
R8=83	R9=63	R10=98	R11=95	R12=82	R13=99	R14=98

