

90+ LIGHTING CHANDELIER C12 4.5W



40W
REPLACEMENT

90+
CRI

4,5W
Watts

E26

120V
Voltage

DAMP LOCATION

Dimmable

High quality of light and color rendering (90+ CRI, 50+ R9),
with low flicker, flicker <30%,

Smooth dimming. Dimming lower than 10%.




ELECTRICAL SPECIFICATIONS


MODEL NO.	LUMEN	POWER	CCT	BEAM	CRI	PF	CBCP
SE-350.042	320LM	4.5W	2700K	260°	>90	>0.9	-
SE-350.153	320LM	4.5W	3000K	260°	>90	>0.9	-

MECHANICAL SPECIFICATIONS

MODEL NO.	MEASURES	WEIGHT	OPERATIONAL TEMPERATURE	INNER BOX QTY	MASTER CARTON QTY
SE-350.042	1.42in X 3.82in	1.38oz	-20°C - 40°C	12pcs	48pcs
SE-350.153	1.42in X 3.82in	1.38oz	-20°C - 40°C	12pcs	48pcs

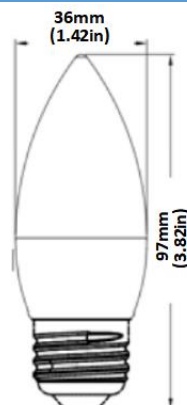

90+ LIGHTING CHANDELIER C12 4.5W

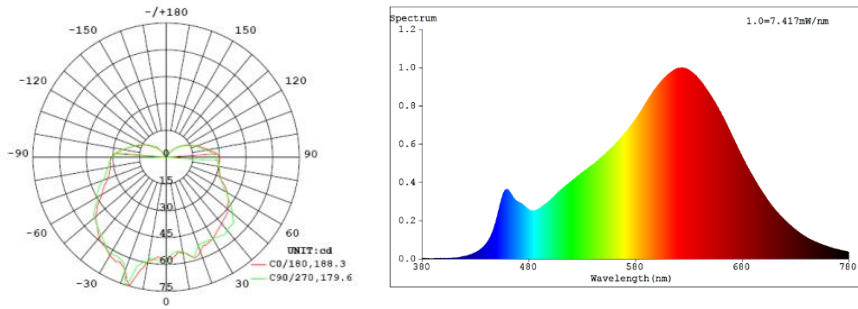


RA – CHART: >90

RA refers to the average value of R1 to R8.

R9 is the score that represents how accurately a light source will reproduce strong red colors. "Accurate" is defined as similarity to daylight or incandescent bulbs, depending on the color temperature.

R VALUES

R1=94	R2=99	R3=96	R4=92	R5=94	R6=96	R7=89
R8=80	R9=60	R10=98	R11=94	R12=85	R13=96	R14=99

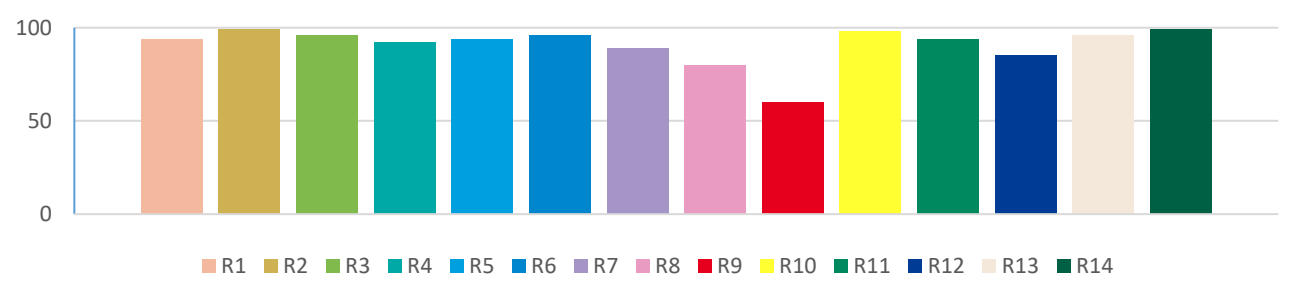

TM30 GRAPHIC

TM-30 deals with the color rendition of object.

Rf- a fidelity index that is similar to the commonly used CRI

Rg- a gamut index that provides information about saturation

Color vector graphic- a graphical representation of hue and saturation relative to a reference source.

