



**SKU: SE-RL6.CE11.1412G**

<b>UL NO.</b>	E481445
<b>LIGHT OUTPUT</b>	850 lumens
<b>CCT</b>	2700K
<b>BEAM ANGLE</b>	40°
<b>CBCP</b>	1635 cd
<b>WATTAGE</b>	12W
<b>EFFICACY</b>	71 lm/W
<b>APPLICATION</b>	Incandescent replacement for indoor/outdoor (wet) application. <b>Suitable for Use in Enclosed Fixture.</b>

90+  
CRI

E26

Dimmable

SUITABLE FOR  
WET LOCATION

2700  
CCT

120V  
Voltage

12W  
Watts

### COLOR RENDERING: 90CRI, R9>50

### FLICKER <30%

High quality of light and low flicker, listed with California Energy Commission's (CEC) JA8/Title 24 standard for quality of light, the most stringent in North America.

### ENERGY EFFICIENCY: 71 lm/W

### LONG LIFE: 25,000 hours.

Listed for energy efficiency by the CEC for Title 20, insuring high efficacy with a high quality of light.

Lamps are also listed by Energy Star.

- ✓ Rated lifetime to L70: 25,000 hours.
- ✓ Warranty: 3 years.

### CERTIFICATIONS AND APPROVALS

UL, ES, CEC TITLE 20, CEC JA8/TITLE24



### HIGHLY COMPATIBLE

Compatible with standard fixtures using an E26 base.

### DIMMABLE

Smooth dimming with most existing installations. Dimmable to 1% when used with specific dimmers. See dimmer compatibility chart for details on operation and compatibility.

### INTENDED USE AND APPLICATIONS

75W incandescent replacement.

Intended for use in E26 compatible existing fixtures.

Suitable for dry or wet locations.


Not for use in fully enclosed fixtures.

Remove or do not use any optional glass lens in front of lamp.


## GENERAL SPECIFICATIONS

Electrical Specifications		Operating Temperature		Mechanical Spec.
<b>Wattage:</b> 12W	<b>Voltage:</b> 120V	<b>Minimum:</b> -20°C		<b>Measures:</b> 3.74in X 4.53in
<b>Power Factor:</b> 0.9	<b>Frequency:</b> 60Hz	<b>Maximum:</b> 40°C		<b>Weight:</b> 5.82oz


## DIMENSIONS

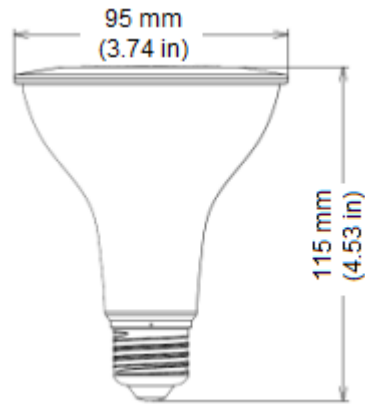

## LUMINOUS INTENSITY

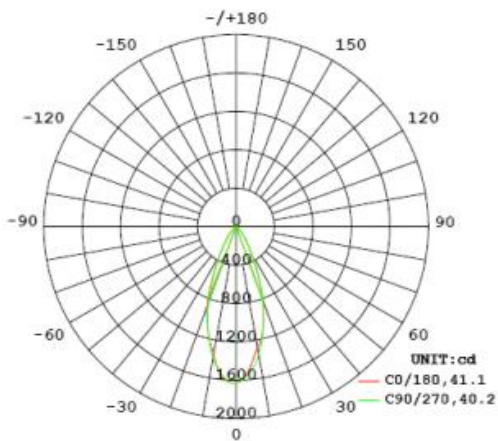

## SPECTRAL DISTRIBUTION

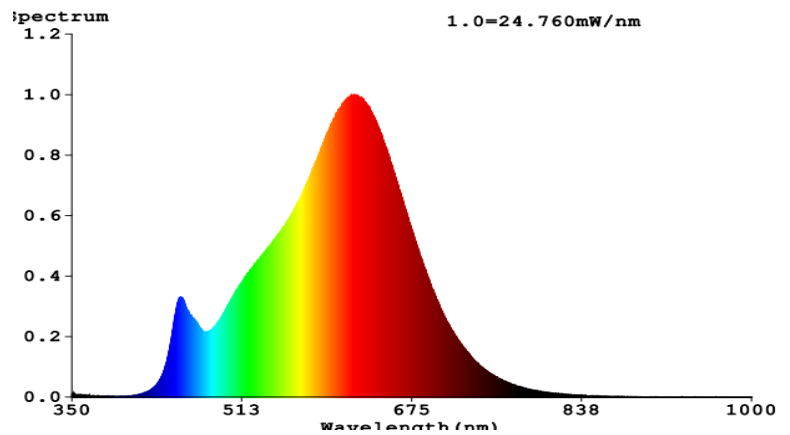

## RA – CHART: 90

### CRI VALUES | R1-R15

