

# 90+ LIGHTING CHANDELIER C12 5W



<b>ETL NO.</b>	E481445
<b>LIGHT OUTPUT</b>	350 lumens
<b>CCT</b>	2700K
<b>BEAM ANGLE</b>	110°
<b>WATTAGE</b>	5W
<b>EFFICACY</b>	70lm/W
<b>POWER FACTOR</b>	0.9
<b>APPLICATION</b>	Incandescent replacement for indoor dry/damp applications.

SKU: SE-RL6.CP05.1105



**COLOR RENDERING: 90CRI, R9>50**

**FLICKER <30%**

High quality of light and low flicker product design

**ENERGY EFFICIENCY: 70 lm/W**

**LONG LIFE: 25,000 hours.**

Listed for energy efficiency by the CEC for Title 20, insuring high efficacy with a high quality of light.

- ✓ Rated lifetime to L70: 25,000 hours.
- ✓ Warranty: 3 years.

#### CERTIFICATIONS AND APPROVALS

ETL, ES.



#### HIGHLY COMPATIBLE

Compatible with standard fixtures using an E12 base.

#### DIMMABLE

Smooth dimming with most existing installations. Dimmable to 1% when used with specific dimmers. See dimmer compatibility chart for details on operation and compatibility.

#### INTENDED USE AND APPLICATIONS


40W incandescent replacement. Intended for use in E12 compatible existing fixtures and table lamps. Suitable for dry or damp locations. Not for use in fully enclosed fixtures. Remove or do not use any optional glass lens in front of lamp.

## GENERAL SPECIFICATIONS


Electrical Specifications		Operating Temperature		Mechanical Spec.	
<b>Wattage:</b> 5W	<b>Voltage:</b> 120V	<b>Minimum:</b> -20°C		<b>Measures:</b> 1.4in X 3.9in	
<b>Power Factor:</b> 0.9	<b>Frequency:</b> 60Hz	<b>Maximum:</b> 40°C		<b>Weight:</b> 1.62oz	

# 90+ LIGHTING CHANDELIER C12 5W


## DIMENSIONS

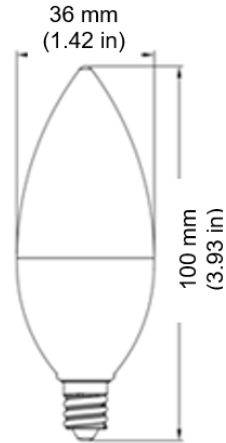

## LUMINOUS INTENSITY

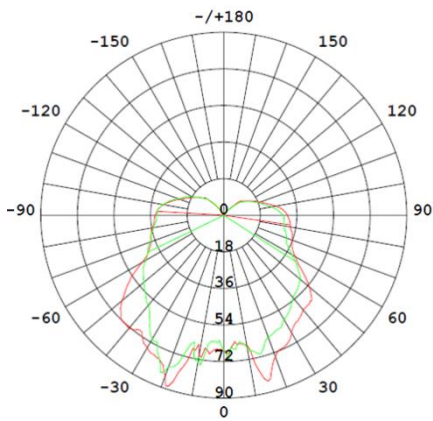

## SPECTRAL DISTRIBUTION

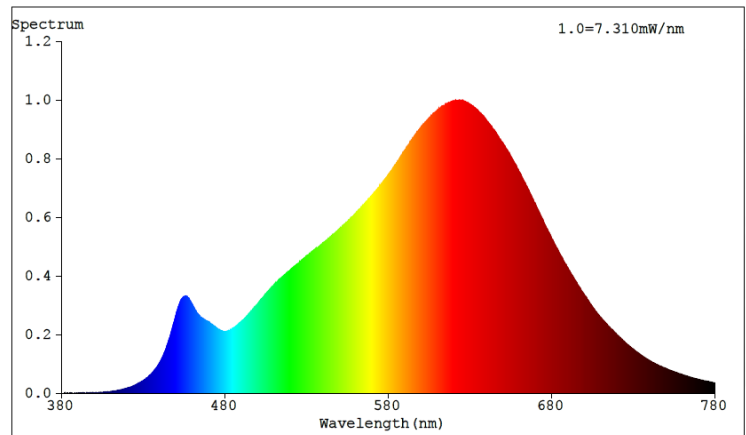

## RA – CHART: 90

### CRI VALUES | R1-R15

