

90+ LIGHTING CHANDELIER C12 4.5W



40W
REPLACEMENT

4,5W
Watts

E 12

120V
Voltage

DAMP LOCATION

Dimmable

Good quality of light and color rendering (80+ CRI, 0+ R9),
Smooth dimming. Dimming lower than 20%.





ELECTRICAL SPECIFICATIONS

MODEL NO.	LUMEN	POWER	CCT	BEAM	CRI	PF	CBCP
SE-350.184	350LM	4.5W	2700K	110°	>80	>0.7	-

MECHANICAL SPECIFICATIONS

MODEL NO.	MEASURES	WEIGHT	OPERATIONAL TEMPERATURE	INNER BOX QTY	MASTER CARTON QTY
SE-350.184	1.39in X 3.89in	0.85oz	-20°C - 40°C	10pcs	100pcs

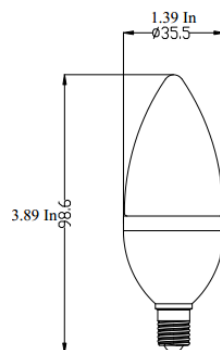

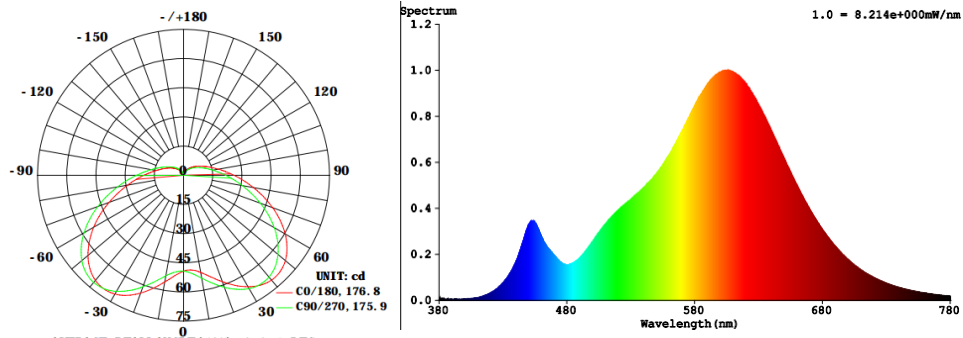


RA – CHART: >80

RA refers to the average value of R1 to R8.

R9 is the score that represents how accurately a light source will reproduce strong red colors. "Accurate" is defined as similarity to daylight or incandescent bulbs, depending on the color temperature.

R VALUES						
R1=79	R2=90	R3=96	R4=78	R5=79	R6=89	R7=81
R8=56	R9=3	R10=78	R11=77	R12=72	R13=82	R14=99

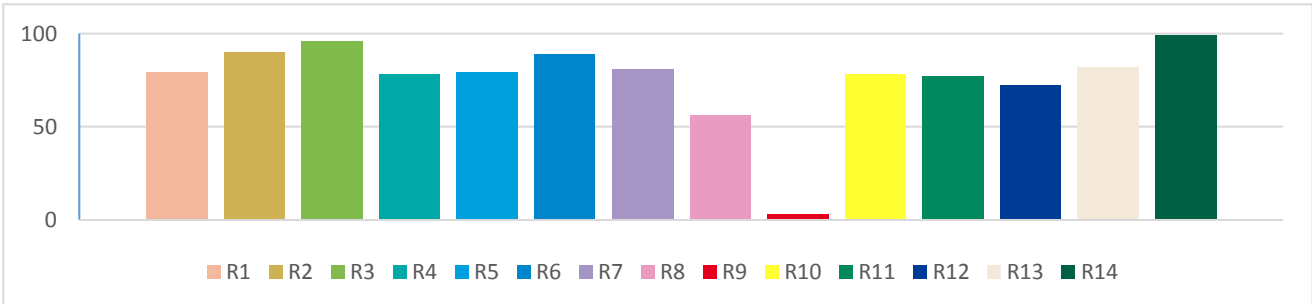

TM30 GRAPHIC

TM-30 deals with the color rendition of object.

Rf- a fidelity index that is similar to the commonly used CRI

Rg- a gamut index that provides information about saturation

Color vector graphic- a graphical representation of hue and saturation relative to a reference source.

