



60W
REPLACEMENT

90+
CRI

7W
Watts

GU10

120V
Voltage

DAMP
LOCATION

Dimmable

High quality of light and color rendering (90+ CRI, 50+ R9),
with low flicker, flicker <30%,
Smooth dimming. Dimming lower than 10%.





ELECTRICAL SPECIFICATIONS

MODEL NO.	LUMEN	POWER	CCT	BEAM	CRI	PF	CBCP
SE-350.003	420LM	7W	2700K	10°	>90	>0.9	4850cd

MECHANICAL SPECIFICATIONS

MODEL NO.	MEASURES	WEIGHT	OPERATIONAL TEMPERATURE	INNER BOX QTY	MASTER CARTON QTY
SE-350.003	1.97in X 2.2in	2.05oz	-20°C - 40°C	-	20pcs

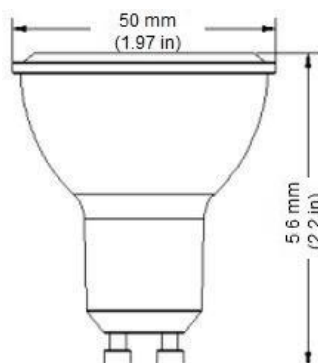

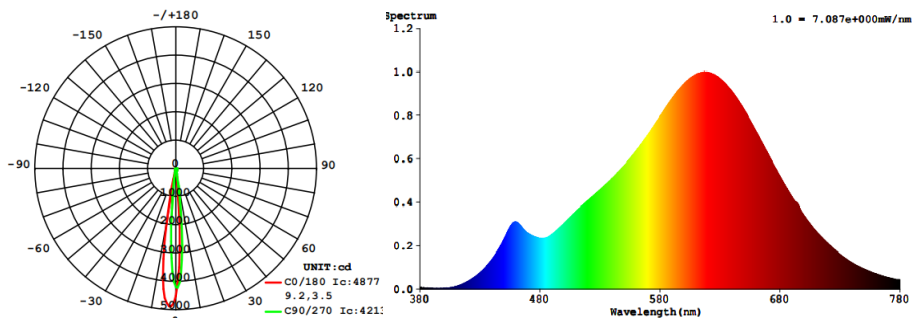

RA – CHART: >90

RA refers to the average value of R1 to R8.

R9 is the score that represents how accurately a light source will reproduce strong red colors. "Accurate" is defined as similarity to daylight or incandescent bulbs, depending on the color temperature.

R VALUES						
R1=92	R2=98	R3=96	R4=91	R5=93	R6=98	R7=89
R8=78	R9=54	R10=95	R11=92	R12=91	R13=94	R14=99

