



50W
REPLACEMENT

90+
CRI

5,5W
Watts

E26

120V
Voltage

WET LOCATION

Dimmable

High quality of light and color rendering (90+ CRI, 50+ R9),
with low flicker, flicker <30%,
Smooth dimming. Dimming lower than 10%.





ELECTRICAL SPECIFICATIONS

MODEL NO.	LUMEN	POWER	CCT	BEAM	CRI	PF	CBCP
SE-350.181	500LM	5.5W	2700K	40°	>90	>0.9	>593cd

MECHANICAL SPECIFICATIONS

MODEL NO.	MEASURES	WEIGHT	OPERATIONAL TEMPERATURE	INNER BOX QTY	MASTER CARTON QTY
SE-350.181	2.48in X 3.19in	1.94oz	-20°C - 40°C	12pcs	48pcs



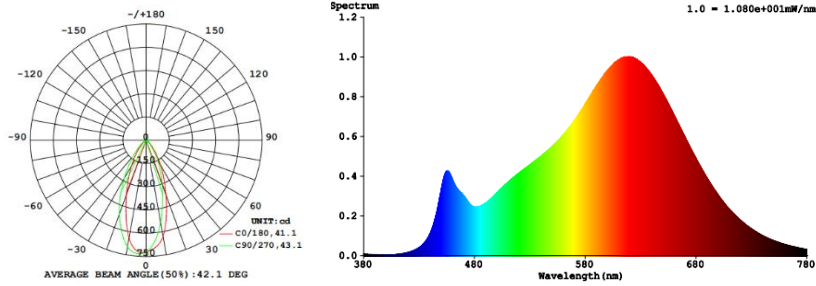


RA – CHART: >90

RA refers to the average value of R1 to R8.

R9 is the score that represents how accurately a light source will reproduce strong red colors. "Accurate" is defined as similarity to daylight or incandescent bulbs, depending on the color temperature.

R VALUES

R1=93	R2=99	R3=95	R4=90	R5=93	R6=96	R7=87
R8=76	R9=52	R10=97	R11=91	R12=85	R13=95	R14=98

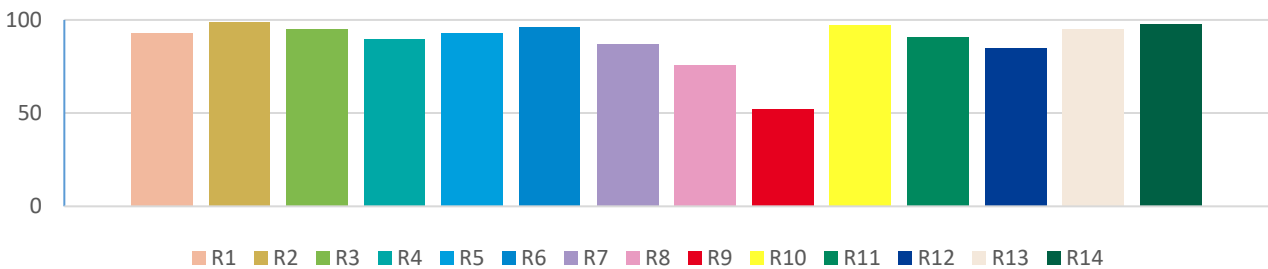

TM30 GRAPHIC

TM-30 deals with the color rendition of object.

R_f - a fidelity index that is similar to the commonly used CRI

R_g - a gamut index that provides information about saturation

Color vector graphic- a graphical representation of hue and saturation relative to a reference source.

