



**45W**  
REPLACEMENT

**90+**  
CRI

**6W**  
Watts

**E26**  
Voltage

**120V**  
Voltage

**DAMP LOCATION**

**Dimmable**

High quality of light and color rendering (90+ CRI, 50+ R9),  
with low flicker, flicker <30%,  
Smooth dimming. Dimming lower than 10%.





## ELECTRICAL SPECIFICATIONS

MODEL NO.	LUMEN	POWER	CCT	BEAM	CRI	PF	CBCP
SE-350.019	450LM	6W	2700K	105°	>90	>0.9	-
SE-350.020	450LM	6W	3000K	105°	>90	>0.9	-

## MECHANICAL SPECIFICATIONS

MODEL NO.	MEASURES	WEIGHT	OPERATIONAL TEMPERATURE	INNER BOX QTY	MASTER CARTON QTY
SE-350.019	1.97in X 3.23in	1.51oz	-20°C - 40°C	12pcs	48pcs
SE-350.020	1.97in X 3.23in	1.51oz	-20°C - 40°C	12pcs	48pcs




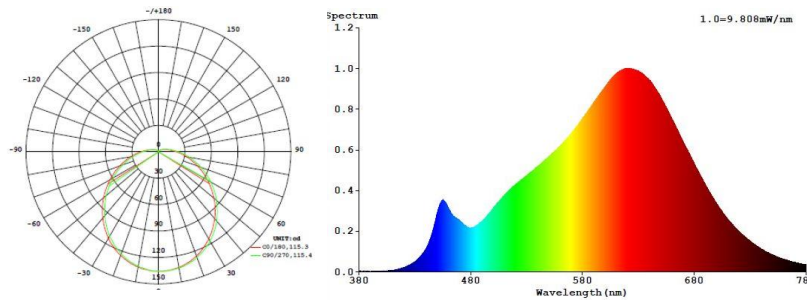

## RA – CHART: >90

RA refers to the average value of R1 to R8.

R9 is the score that represents how accurately a light source will reproduce strong red colors. "Accurate" is defined as similarity to daylight or incandescent bulbs, depending on the color temperature.

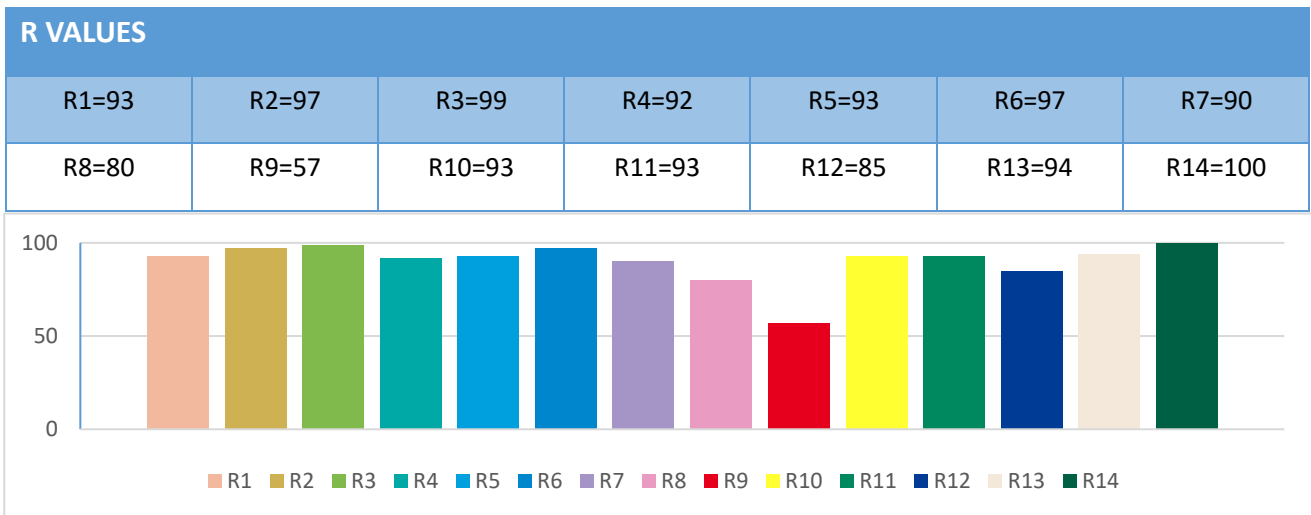

## TM30 GRAPHIC

TM-30 deals with the color rendition of object.

R<sub>f</sub>- a fidelity index that is similar to the commonly used CRI

R<sub>g</sub>- a gamut index that provides information about saturation

Color vector graphic- a graphical representation of hue and saturation relative to a reference source.

