



50W
REPLACEMENT

90+
CRI

6W
Watts

GU10

120V
Voltage

DAMP
LOCATION

Dimmable

High quality of light and color rendering (90+ CRI, 50+ R9),
with low flicker, flicker <30%,
Smooth dimming. Dimming lower than 10%.






ELECTRICAL SPECIFICATIONS

MODEL NO.	LUMEN	POWER	CCT	BEAM	CRI	PF	CBCP
SE-350.185	500LM	6W	2700K	15°	>90	>0.9	3000cd
SE-350.186	500LM	6W	3000K	15°	>90	>0.9	3000cd

MECHANICAL SPECIFICATIONS

MODEL NO.	MEASURES	WEIGHT	OPERATIONAL TEMPERATURE	INNER BOX QTY	MASTER CARTON QTY
SE-350.185	1.97in X 2.11in	0.92oz	-20°C - 40°C	12pcs	48pcs
SE-350.186	1.97in X 2.11in	0.92oz	-20°C - 40°C	12pcs	48pcs




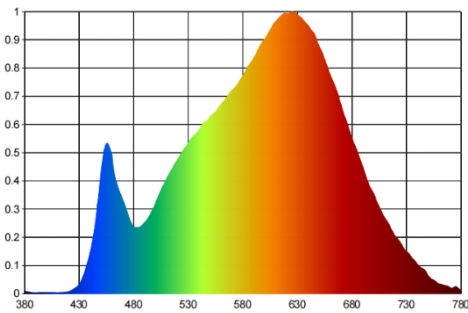

RA – CHART: >90

RA refers to the average value of R1 to R8.

R9 is the score that represents how accurately a light source will reproduce strong red colors. "Accurate" is defined as similarity to daylight or incandescent bulbs, depending on the color temperature.

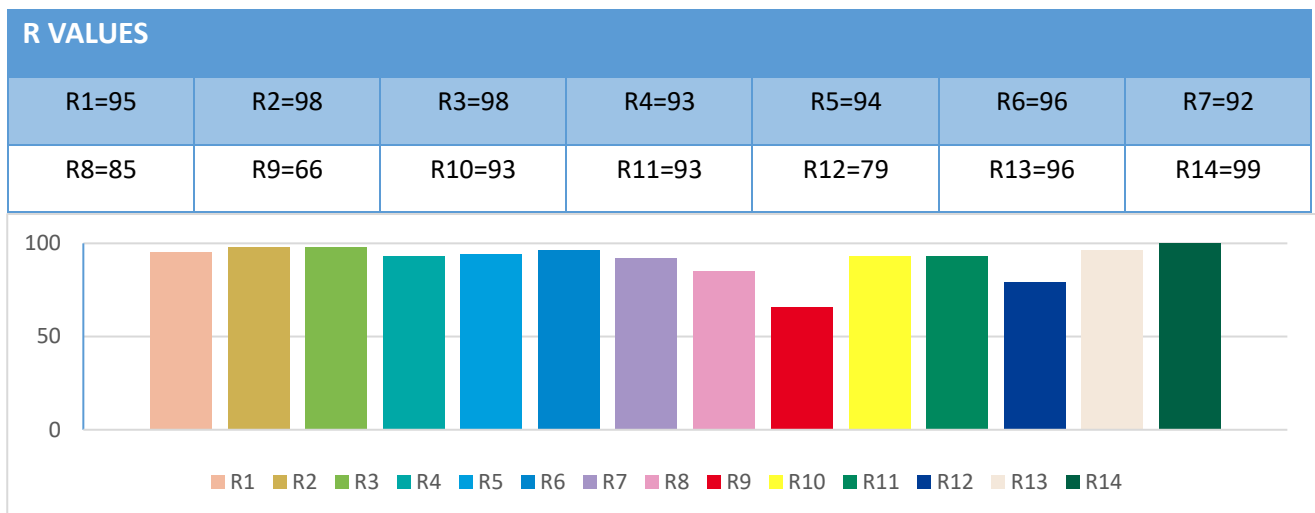

TM30 GRAPHIC

TM-30 deals with the color rendition of object.

Rf- a fidelity index that is similar to the commonly used CRI

Rg- a gamut index that provides information about saturation

Color vector graphic- a graphical representation of hue and saturation relative to a reference source.

TM-30 Rf	90
TM-30 Rg	97
CCT (K)	2710
Duv	-0.0026

